

CW-6200

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode

$\pm 0.5^{\circ}\text{C}$

Temperature
Stability


TEYU

www.teyuchiller.com


Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

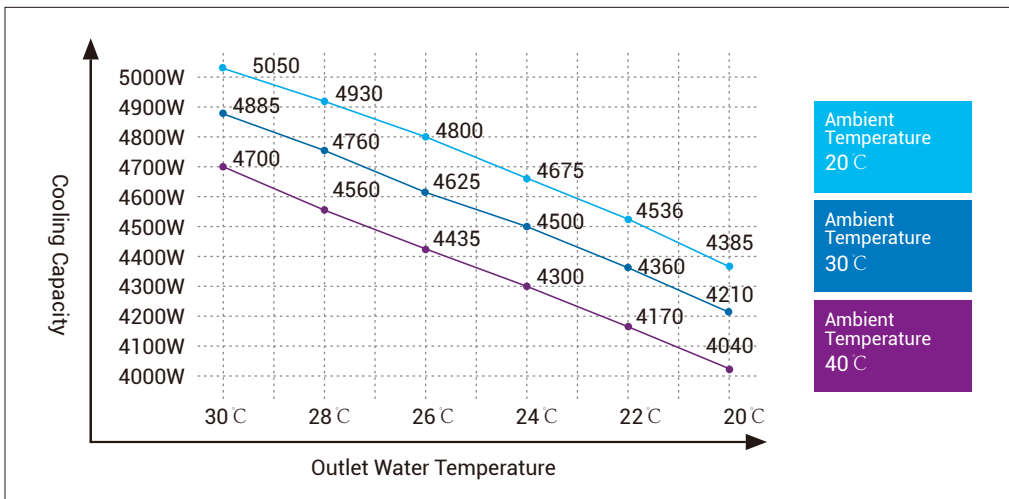

Pump Performance

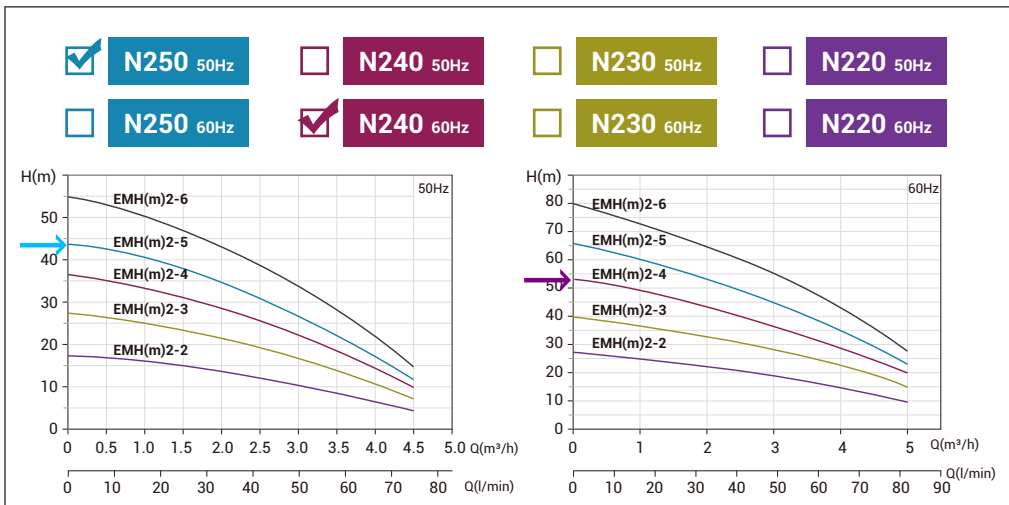


Technical Data:

Model	CW-6200ANTY250	CW-6200BNTY250
Voltage	AC 1P 220~240V	
Frequency	50Hz	60Hz
Current	2.3~13.9A	2.1~12.9A
Max. power consumption	2.43 kW	2.25 kW
Compressor power	1.75 kW	1.7 kW
	2.38 HP	2.31 HP
Nominal cooling capacity	17201 Btu/h	17338 Btu/h
	5.04kW	5.08kW
	4333 Kcal/h	4368 Kcal/h
Pump power	0.55 kW	
Max. pump pressure	44 M	
Max. pump flow	75L/min	
Refrigerant	R-410a	
Precision	±0.5°C	
Reducer	Capillary	
Tank capacity	14L	
Inlet and outlet	Rp1/2"	
N.W	65Kg	
G.W	77Kg	
Dimension	67 X 47 X 89 cm (L X W X H)	
Package dimension	73 X 57 X 105 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

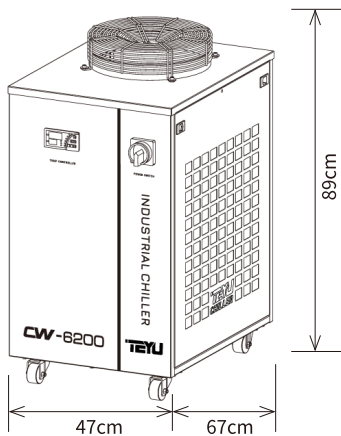

PACKAGE DIMENSION

