



# CW-5200

T-SERIES  
INDUSTRIAL CHILLER

**INNOTECH**  
LASER



Professional Temperature Control



**TEYU**


[www.teyuchiller.com](http://www.teyuchiller.com)

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


## Features:

1. Temperature stability of  $\pm 0.3^{\circ}\text{C}$  ;
2. Dual frequency power specification 220V 50/60Hz;
3. Constant & intelligent temperature control modes.

## Cooling Performance

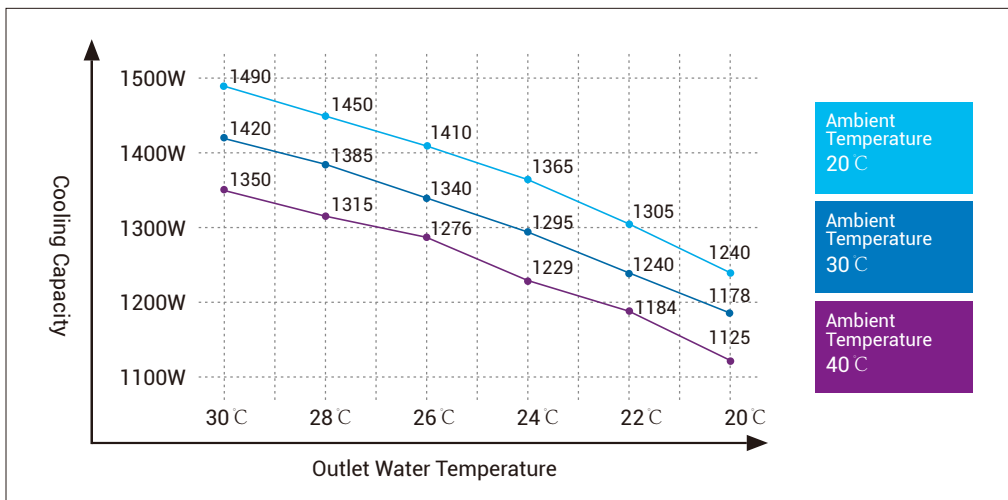

## Pump Performance

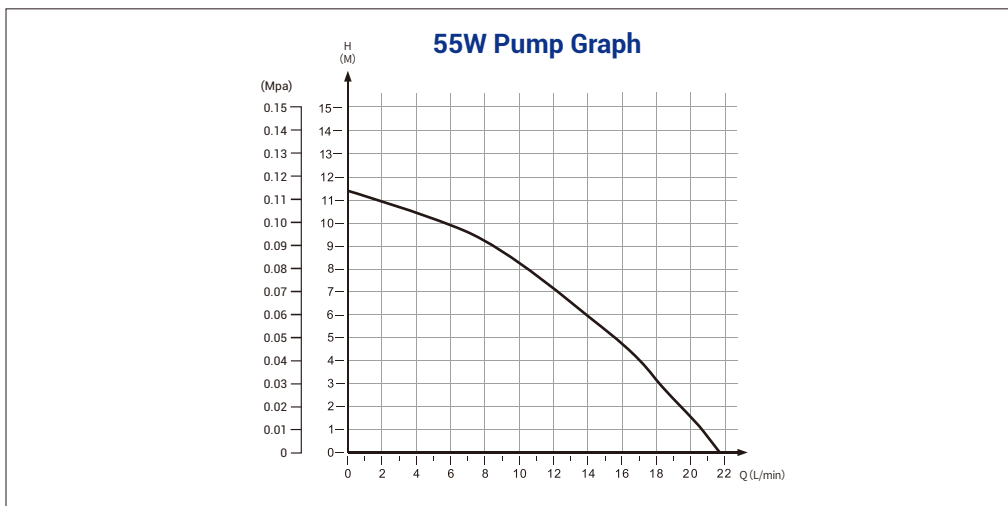


## Technical Data:

Model	CW-5200THTY	CW-5200DHTY
Voltage	AC 1P 220V~240V	AC 1P 110V
Frequency	50/60Hz	60Hz
Current	0.5~4.8 A	0.5~8.9 A
Max. power consumption	0.73/0.75kW	0.77 kW
Compressor power	0.6/0.62kW	0.66 kW
	0.82/0.84HP	0.9 HP
Nominal cooling capacity	6040/7303Btu/h	5699 Btu/h
	1.77/2.14kW	1.67 kW
	1521/1839Kcal/h	1435 Kcal/h
Max. pump pressure	0.05kW	
Max. pump flow	12M	
Max. flow	13L/min	
Refrigerant	R-134a	R-410a
Precision	±0.3°C	
Reducer	Capillary	
Tank capacity	6L	
Inlet and outlet	OD 10mm barbed connector	
N.W	25Kg	24Kg
G.W	28Kg	27Kg
Dimension	58 X 29 X 47 cm (L X W X H)	
Package dimension	65 X 36 X 51 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

## DIMENSION

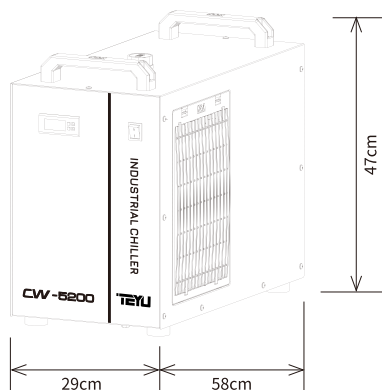

## PACKAGE DIMENSION

