

CW-6000

INDUSTRIAL CHILLER



Professional Temperature Control



Dual Temperature
Control Mode


$\pm 0.5^{\circ}\text{C}$

Temperature
Stability


Features:

1. Temperature stability of $\pm 0.5^{\circ}\text{C}$;
2. Designed with multiple alarms & error display functions;
3. With CE, RoHS and REACH approval.

Cooling Performance

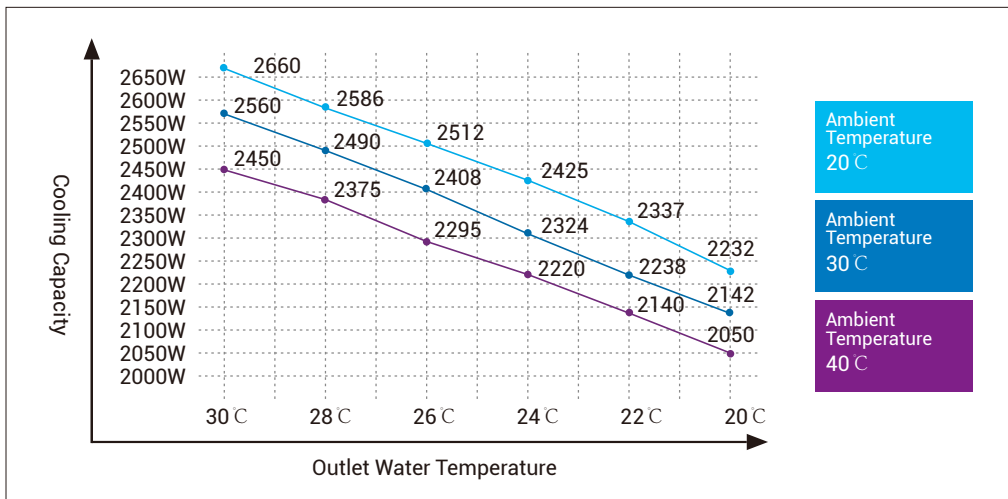

Pump Performance

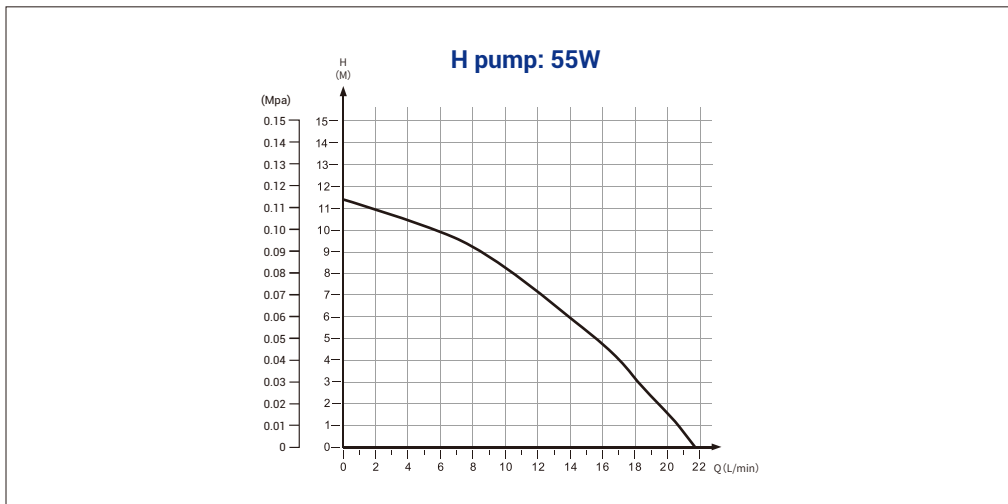


Technical Data:

Model	CW-6000AHTY	CW-6000BHTY	CW-6000DHTY
Voltage	AC 1P 220~240V		AC 1P 110V
Frequency	50Hz	60Hz	60Hz
Current	0.5~7.2A	0.5~6.6A	0.5~13.5A
Max. power consumption	1.26kW	1.25kW	1.36kW
Compressor power	1.11kW	1.08kW	1.19kW
	1.48 HP	1.44HP	1.59HP
Nominal cooling capacity	11160 Btu/h	10717 Btu/h	11775 Btu/h
	3.27 kW	3.14 kW	3.45 kW
	2811 Kcal/h	2700 Kcal/h	2966 Kcal/h
Pump power	0.05 kW		
Max. pump pressure	12 M		
Max. pump flow	13 L/min		
Refrigerant	R-410a		
Precision	±0.5°C		
Reducer	Capillary		
Tank capacity	14L		
Inlet and outlet	Rp1/2"		
N.W	53Kg		
G.W	63Kg		
Dimension	67 X 47 X 89 cm (L X W X H)		
Package dimension	73 X 57X 105 cm (L X W X H)		

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

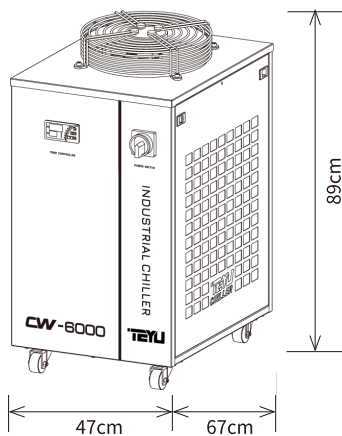

PACKAGE DIMENSION

