

CW-5200

T-SERIES
INDUSTRIAL CHILLER

INNOTECH
LASER



Professional Temperature Control



Dual
Frequency
Power
220V
50/60Hz

Temperature
Stability
±0.3°C




www.teyuchiller.com

The above information is for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right for final interpretation and content revision without notice in advance.


Features:

1. Temperature stability of $\pm 0.3^{\circ}\text{C}$;
2. Dual frequency power specification 220V 50/60Hz;
3. Constant & intelligent temperature control modes.

Cooling Performance

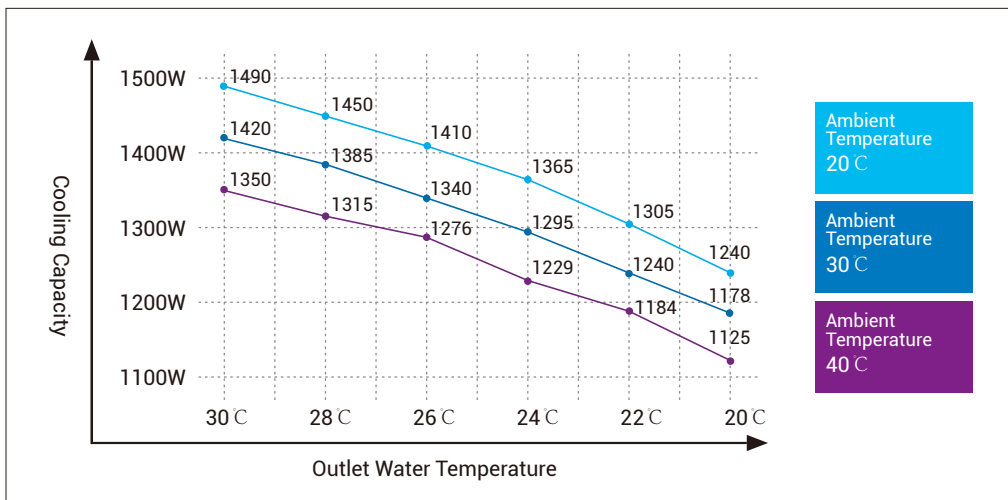

Pump Performance

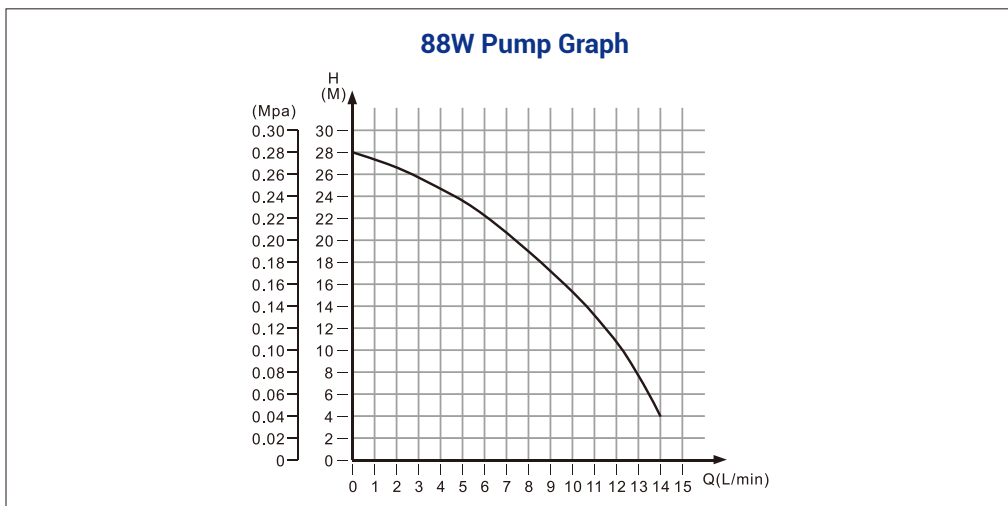


Technical Data:

Model	CW-5200TITY	CW-5200DITY
Voltage	AC 1P 220V~240V	AC 1P 110V
Frequency	50/60 Hz	60Hz
Current	0.6~4.9A	0.6~8.6A
Max. power consumption	0.76/0.85 kW	0.78kW
Compressor power	0.82/0.95 kW	0.66 kW
	1.1/1.3 HP	0.9 HP
Nominal cooling capacity	6040/7098 Btu/h	5699 Btu/h
	1.77/2.08 kW	1.67 kW
	1521/1788 Kcal/h	1435 Kcal/h
Max. pump pressure	0.09kW	
Max. pump flow	25M	
Max. flow	15L/min	
Refrigerant	R-134a	R-410a
Precision	±0.3°C	
Reducer	Capillary	
Tank capacity	6L	
Inlet and outlet	10mm fast connector	
N.W	25Kg	23Kg
G.W	28Kg	26Kg
Dimension	58 X 29 X 47 cm (L X W X H)	
Package dimension	65 X 39 X 62 cm (L X W X H)	

Note: the working current can be different under different working conditions. The above information is for reference only. Please subject to the actual delivered product.

DIMENSION

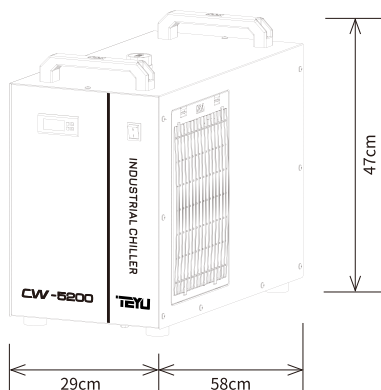

PACKAGE DIMENSION

